

Ultra Stretch Signage, 58:9 Space-Fitting Wide Screen

The 86BH5F is the most suitable display for delivering new forms of advertising and multiplexed information in a 58:9 widescreen format. It can bring unused & leftover space to life by being installed without restriction.



58:9 Wide Screen



High Picture Quality



Effective Content Delivery




Convenient Maintenance



58:9 Extended Wide Format

It is a unique wide screen with 58:9 bar type which provides much more flexibility in playing content* than the conventional display of 16:9 ratio.

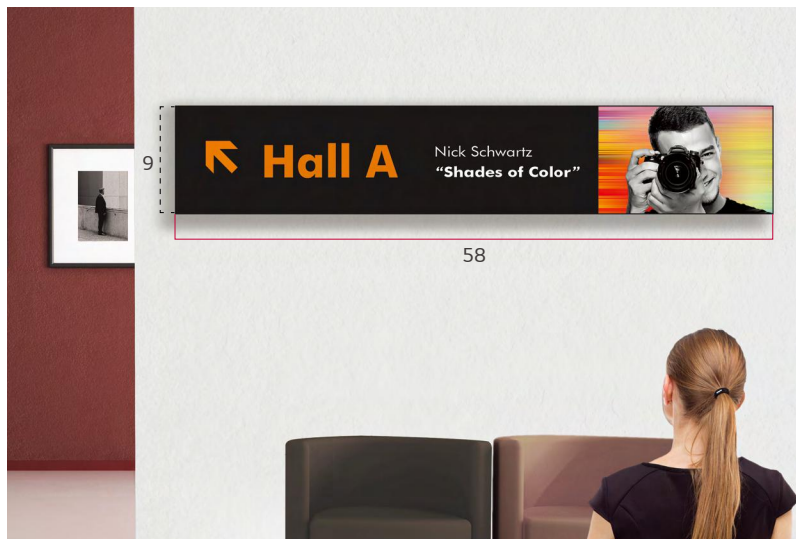

* Video content only. (Images not supported)

Ultra HD Resolution (3,840 × 600)

Ultra HD resolution delivers an immersive viewing experience with vivid colors and clear images.



Multi Screen Mode with 4PBP

The Picture-by-Picture (PBP) feature allows you to show multi content in one single display by up-to four parts. It is very useful and convenient to deliver various advertisements or pieces of information at the same time without calibration.



Tiled Scene with Immersive View

The 86BH5F can show a tiled scene by up to 15 x 15 configuration. This will be the best choice if you want to use a large screen, or provide visual impact to your customers in a different way.




IP5x Certified Design

The IP5x Dust-Proof Certification ensures that the product is completely protected from dust, eliminating the risk of performance degradation.



User-Friendly UX


The 86BH5F is equipped with a user-friendly UX to simplify approach flows, groups similar functions together, and adopts an intuitive GUI for ease of use. When using the display in portrait mode, OSD* can also be adjusted accordingly.

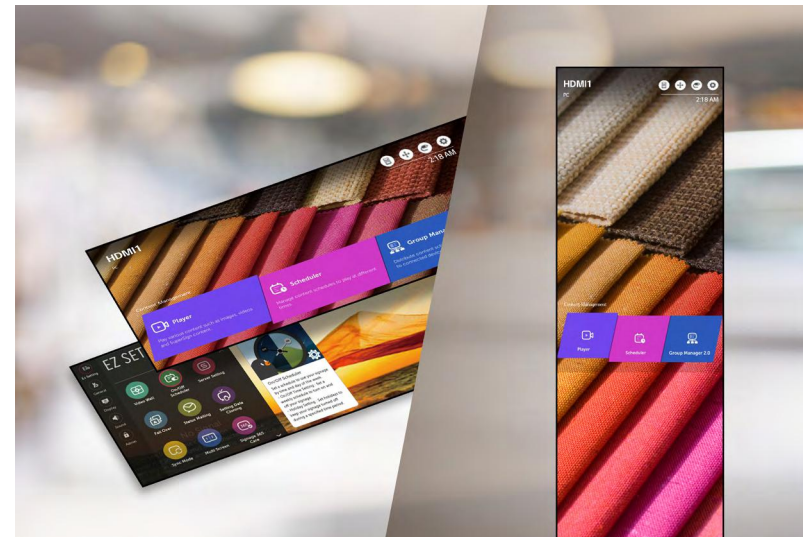

* OSD : On Screen Display


LAN Daisy Chain Management

By using this daisy-chained network feature, you can execute commands such as controlling, monitoring and even updating firmware.

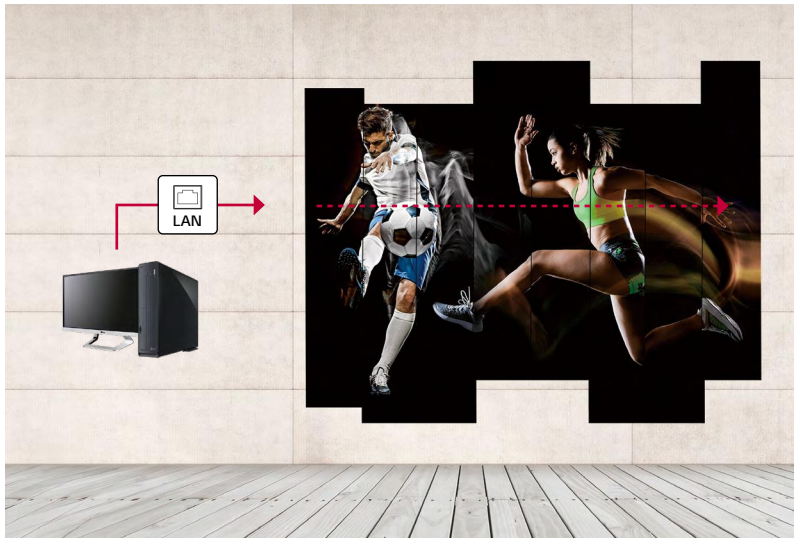

Real-Time Monitoring with ConnectedCare

Easier and faster maintenance are available with our optional cloud service solution ConnectedCare*. It remotely manages the status of displays in client workplaces for fault diagnosis and remote-control services, enabling the stable operation of clients' businesses.

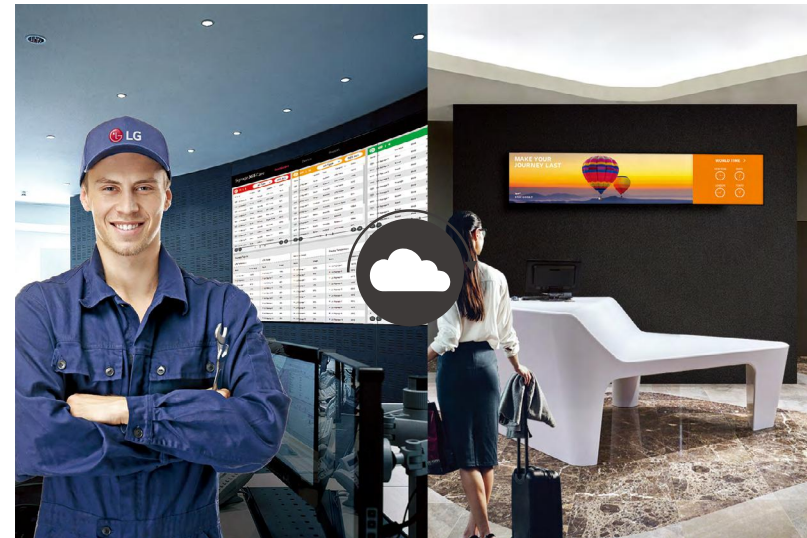


* ConnectedCare is the brand name of LG Signage365Care Service. The availability differs by region.

DIMENSION (unit: mm)



CONNECTIVITY

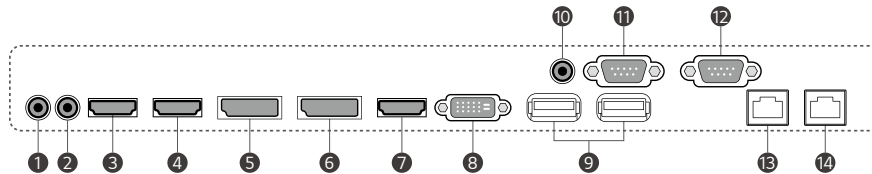

- | | | | |
|------------------|------------------|---------------------|-----------|
| ① AUDIO In | ⑤ DP In | ⑨ USB 2.0 In | ⑬ LAN In |
| ② AUDIO Out | ⑥ DP Out | ⑩ IR & LIGHT SENSOR | ⑭ LAN Out |
| ③ HDMI(1) In 2.0 | ⑦ HDMI(3) In 1.4 | ⑪ RS-232C In | |
| ④ HDMI(2) In 2.0 | ⑧ DVI-D In | ⑫ RS-232C Out | |



SPECIFICATIONS

86BH5F

| | | | |
|-----------------------------|--------------------------------|--|------------------------------|
| Panel | Screen Size | 86" | |
| | Panel Technology | IPS | |
| | Native Resolution | 3,840 × 600 | |
| | Brightness (Typ.) | 500 nit | |
| | Contrast Ratio | 1,100 : 1 | |
| | Dynamic CR ¹⁾ | 500,000 : 1 | |
| | Color Gamut | NTSC 72 % | |
| | Viewing Angle (H × V) | 178 × 178 | |
| | Color Depth | 1.07 Billion Colors (10bit) | |
| | Response Time | 8 ms (G to G) | |
| Connectivity | Input | HDMI (3 HDCP 2.2), DP (HDCP 2.2), DVI-D (HDCP 1.4), Audio, USB 2.0 Type A (2) | |
| | Output | DP, Audio | |
| Physical Specification | External Control | RS232C In / Out, RJ45 (LAN) In / Out, IR In | |
| | Bezel Color | Black | |
| | Bezel Width | 4.4 mm (R/L), 5.9 mm (T/B) | |
| | Monitor Dimensions (W × H × D) | 2,158.3 × 348.5 × 81.7 mm | |
| | Weight (Head) | 20.5 kg | |
| | VESA™ Standard Mount Interface | 600 × 200 mm | |
| | Special Features | Internal Memory (8GB), Built-in Wi-Fi, Temperature Sensor, Auto Brightness Sensor, Current Sensor, Local Key Operation, webOS 4.0, Embedded CMS (Local Contents Scheduling, Group Manager), USB Plug & Play, Fail Over, Background Image (Booting Logo Image, No Signal Image), Sync Mode (RS-232C Sync, Local Network Sync), Multi-Screen (PBP (4)), Rotation (Screen Rotation, External Input Rotation), Tile Mode Setting (Max. 15 × 15), Setting Data Cloning, SNMP, ISM Method, Auto Set ID, Status Mailing, Control Manager, Crestron Connected ³⁾ , Smart Energy Saving, PM Mode, Wake on LAN, Beacon, HDMI-CEC ³⁾ , webRTC | |
| | Environment Conditions | Operation Temperature Range: 0 °C to 40 °C Operation Humidity Range: 10 % to 80 % | |
| | Power | Power Supply | AC 100 - 240 V -, 50 / 60 Hz |
| | | Power Type | Built-in Power |
| Sound | Power Consumption | Typ. / Max. 220 W / 240 W | |
| | BTU (British Thermal Unit) | 751 BTU/Hr (Typ.), 819 BTU/Hr (Max.) | |
| Certification | Speaker | No | |
| | Safety | CB, NRTL | |
| | EMC | FCC Class "A" / CE / KC | |
| Media Players Compatibility | ErP | Yes | |
| | OPS Type Compatible | Yes (Piggyback) | |
| Software Compatibility | OPS Power Built In | No | |
| | | SuperSign CMS ⁴⁾ , SuperSign Control / Control+, SuperSign WB, SuperSign Media Editor, ConnectedCare ⁵⁾ | |
| Accessories | Basic | Remote Controller, Power Cord, DP Cable, RS-232C Cable, IR/Light Sensor Receiver, Manual | |
| | Optional | OPS Kit (KT-OPSF) | |

1) The luminosity ratio of Full Black / Full White color on video input condition. 2) Network based control
3) Compatibility may differ by equipment. 4) The SuperSign Editor function is not supported. 5) The availability can differ by region.

* Dimensions & Jack Panels may differ from the above image, so please contact LG salesteam to verify before ordering.

* Specification are subject to change without notice, so please contact LG sales team to verify before ordering.



Download
LG C-Display+
Mobile App
Google Play Store

- www.lg.com/global/business/information-display
- www.youtube.com/c/LGCommercialDisplay
- www.facebook.com/LGInformationDisplay
- www.linkedin.com/company/lginformationdisplay
- twitter.com/LG_ID_HQ

LG may make changes to specifications and product descriptions without notice.
Copyright © 2021 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
The names of products and brands mentioned here may be the trademarks of their respective owners.

