
# **Outdoor Digital Advertising Displays**

22" | 32" | 43" | 49" | 55" | 65"



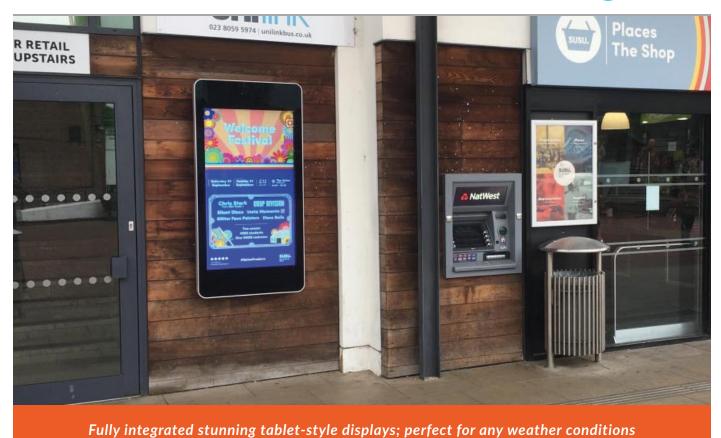

## **Direct Sunlight Readable**

Thanks to their commercial grade ultra-high brightness panels (2,500cd/m²), these displays are up to 10 times brighter than a domestic TV and so are easily readable even in direct sunlight.





\*22" Display is 2,000cd/m<sup>2</sup>

2,500cd/m<sup>2</sup>

## Weatherproof

Designed to withstand the elements, these displays are protected against all wet weather conditions and airborne dust particles by their robust IP65 rated enclosure. They also feature a waterproof coating on all internal circuit boards and waterproof over-moulded AV connectors.









Vandal Proof



Advanced Temperature Control System



Anti-Reflective Glass



Ambient Light Sensor



Protective UV Film



Landscape or Portrait



Plug and Play



Vandal Proof Wi-Fi Aerial



24/7 Usage



**Customisation Available** 



#### **Vandal Proof**

With a mild steel enclosure and thermally-toughened glass front, these IK10 rated displays are designed to withstand any damage that may occur in public spaces. To avoid tampering, controls and inputs are hidden and cannot be accessed by passers-by.



#### **Anti Reflective Glass**

The front glass face is specially treated to help diffuse direct sunlight, making the display easily readable even in bright weather conditions.



## **Optional Network Upgrade**

The integrated Android media player allows you to easily update on-screen content via USB plug and play. Alternatively, upgrade your screen to be networked without needing any additional hardware to unlock our cloud-based CMS software. Third-party software can be installed instead if required.



## Free Lockable Wall Mount

To ensure that this a complete turnkey solution, a lockable wall mount is included at no extra cost, allowing you to securely mount your screen in either landscape or portrait orientation.



## **Advanced Temperature Control System**

To maximise the lifespan of the display, the internal airflow system keeps the screen running at the optimal temperature regardless of the external conditions. Built-in air conditioning can be tailored to allow the display to work in any climate.



## **Ultimate UV Protection**

The front glass of the display utilises a special UV treatment that reduces the internal heat of the enclosure by up to 71%; reducing the number of cooling fans needed and increasing the life of your display.



### **Internal Locker**

Should you need run the screen from an external source, there is space to fit a small PC or media player inside the lockable compartment. This can then be connected to the display via the HDMI, VGA or 3.5mm audio inputs.



## **Customisation Available**

Bespoke displays can be manufactured to order should you require a non-standard solution, to incorporate a camera or touch screen upgrade for example. We can also modify existing models to add a 4G module for mobile connectivity or a vinyl logo/wrap.

















		22 Inch	32 Inch	43 Inch	49 Inch	55 Inch	65 Inch	
	Resolution			1920×1080			3840x2160	
	Display Area (mm)	477x270	702x396	941x529	1073x603	1215x686	1428.5x803.5	
	Aspect Ratio		,	16	5:9			
Panel	Brightness (cd/m²)	2,000	2,000 2,500					
	Colour		16.7M					
	Viewing Angle		178°					
	Contrast Ratio		8000:1					
AV Inputs	Video	HDMI, VGA (Internal)	HDMI, VGA (Internal) HDMI, VGA					
Power	Power Consumption (W)	130	190	250	300	430	550	
	Input Voltage		AC110~240V (50Hz~60Hz)					
Mechanical	Unit Size (WxHxD mm)	737x397x120	1041x516x130.2	1410x670x140	1500x746x140	1637x817x140	1910x990x140	
	Package Size (WxHxD mm)	860x560x280	1180x650x300	1550x850x300	1630x900x300	1780x1050x300	2060x1280x330	
	Landscape VESA Holes (mm)	250x250	340x340	400x400	800x500	800x600	1100x400/1300x400	
	Portrait VESA Holes (mm)				500x800	600x800	600x800/600x1000	
	Net Weight (kg)	22	40	65	82	95	115	
	Gross Weight (kg)	27	48	82.5	101	115.5	168	
	IK Rating		IK10					
Environmental	Operating Temperature:		-20 °C to 50 °C					
	Operating Humidity:		10% - 80%					
	Storage Temperature:		-30°C - 60°C					
	Storage Humidity:		5% - 90%					
	Enclosure Protection		IP65					
Computer	Media Formats	Vide	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)					
	Media Resolution		1920x1080/1080x1920					
	Internal Memory		6GB					
	CPU		Quad-Core Cortex-A17@1.61GHz					
	GPU		Mali-T760 MP4 @600MHz					
	RAM		2GB DDR3					
	Internal Storage		8GB NAND					
	USB		USB2.0 HOST (x2)					
	LAN		10/100/1000Mb/s Ethernet					
	Wi-Fi		802.11b/g/n/ac					
	OS		Android 5.1.1					
	Graphic Engine		OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1					
Accessories	Included		AC Power Cable, Remote Control, Wall Mount					
	Optional		Touch Screen Upgrade, Network Upgrade, Camera					
Warranty	Warranty Period		3 Year Warranty					

#### Errors and omissions excepted

